


Front Fog Lamp Replacement



Callout	Component Name
<b>Preliminary Procedure</b>  1. Remove either the right front or left front wheelhouse liner. Refer to <a href="#">Front Wheelhouse Liner Replacement</a> . 2. Disconnect the electrical connector from the fog lamp bulb socket.	
1	Front Fog Lamp Screw (Qty: 3)  <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.  Remove the three fog lamp mounting screws from the front bumper fascia.
2	Front Fog Lamp  <b>Procedure</b>  Aim the front fog lamps after replacement. Refer to <a href="#">Fog Lamp Aligning</a> .

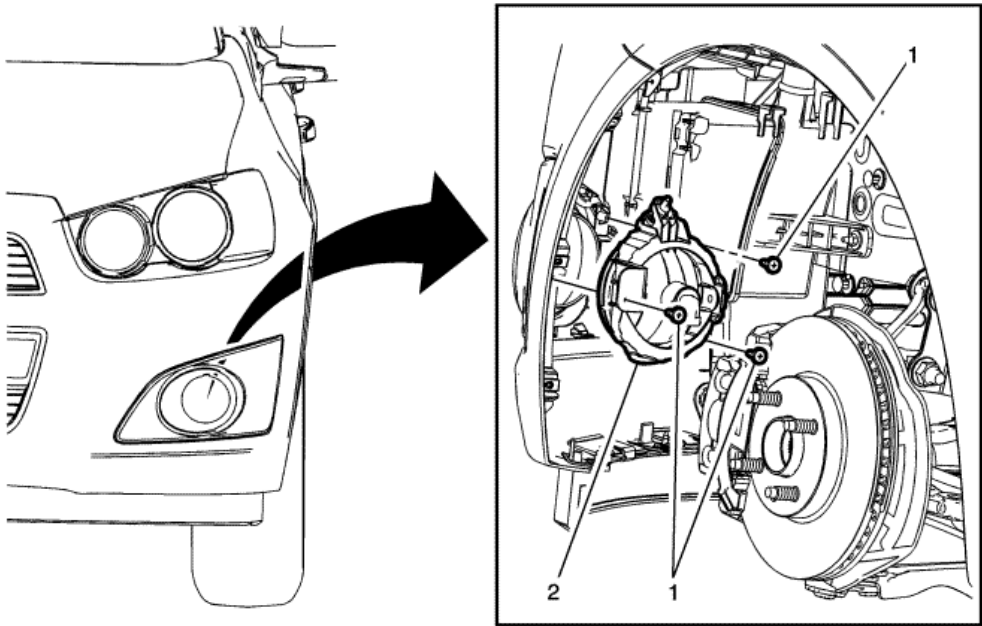